

# MONSTERPUMP-200 24 VDC

200  
l/min

24  
VDC

0.74  
kW



## Hi-flow diesel pump group

MONSTERPUMP-200 24 VDC

000900000

### USE

- Self-suction, self-priming pump with eccentric blades
- Group composed of two AG-90 pumps joined with a manifold (the manifold can be manufactured on demand)
- Suitable for the high flow diesel transfer where there is not available the connection at 230 VAC or 110 VAC

### TECHNICAL FEATURES

Flow rate	210 l/min
Consumption	30-47 A
Pressure	1.4 bar
Motor	2 x 0.37 kW
Protection	IP-55
Duty	continuous (S1)
rpm	1,500
Temperature	-10 °C to +50 °C
Max. suction length	2.7 m
Connection	1 1/2" BSP
Dimensions LxWxH (approx.)	440 x 410 x 460 mm
Weight (approx.)	35 kg


\*Size and weight according to the photo model

### OPTIONAL

Metallic bedplate trolley with wheels

Hoses and accessories

Hose-reel

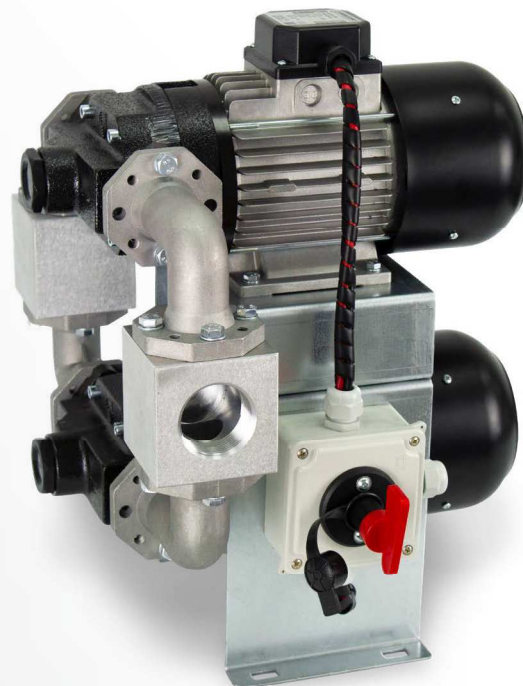

It is possible to easily change the inlet and outlet direction.



Manufactured manifold on demand.

\*Because of the constant innovations and development, TOT COMERCIAL, SA reserves the right to modify the specifications of their products and publicity without prior notification.

Ref. 20230517.V7